
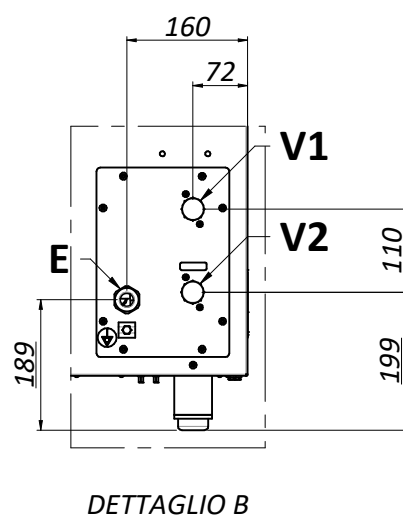
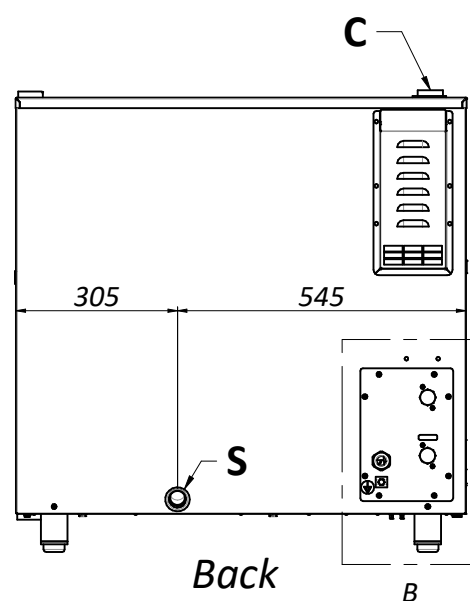
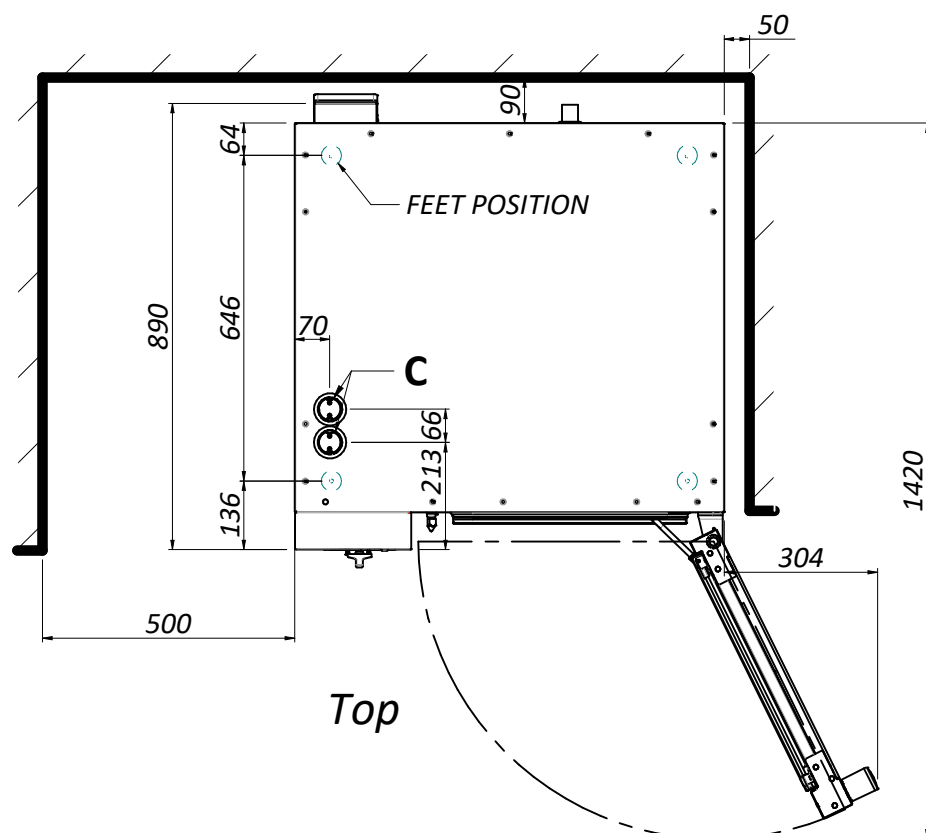


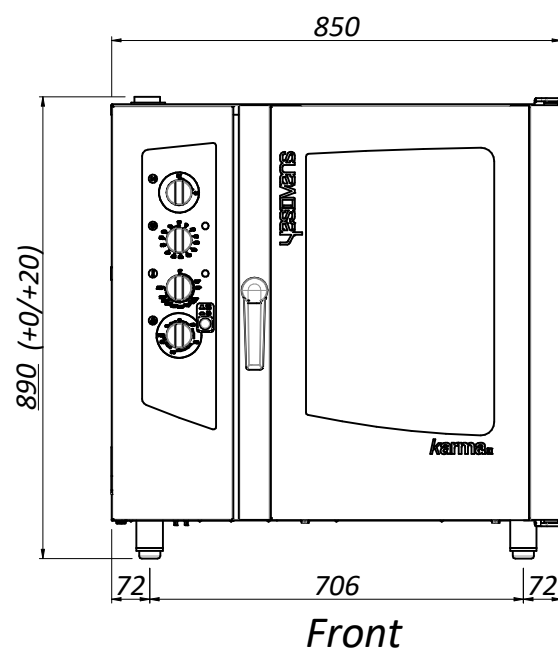

C: Steam outlet chimney / Air inlet chimney
V1: Washing solenoid valve
V2: Steam solenoid valve
E: Elettric connection
S: Drain water

Dimensions and weight

Oven width: 850 mm
 Oven depth: 890 mm
 Oven height: 890 mm
 Net weight full optional: 102 kg

Packaging width: 915 mm
 Packaging depth: 1000 mm
 Packaging height: 1045 mm
 Weigh with packaging full optional: 117 kg
 Packaging volume: 0.95 m³

Installation

Minimum left side distance: 500 mm
 Minimum right side distance: 50 mm
 Minimum back distance: 50 mm
 Min. distance from heat sources: 500 mm

Electrical connection

Supply: 380-415 V 3N 50/60 Hz
 230 V 3P 50/60 Hz
 230 V 1N 50/60 Hz

Max power: 11 kW

Current: 17 A
 30 A
 50 A

Cable: 5x4 mm²
 H07RN-F

Water connection

Water wash connection V1: 3/4"
 Steam water connection V2: 3/4" softened
 Water pressure: 1.5-5 bar
 Water hardness: 4° d
 Minimum Condutance: 50 µS/cm
 Exhaust size S: 32 mm

Capacity

Trays type: 6040
 Number of trays: 6

Distance between trays: 80 mm

Max load: 30 kg
 Max load single tray: 5 kg

IP rating: IPx4

393900009 DATA_SHEET_KARMA_6T_G19