
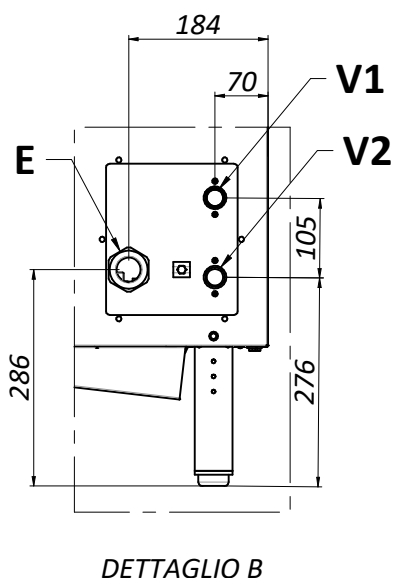
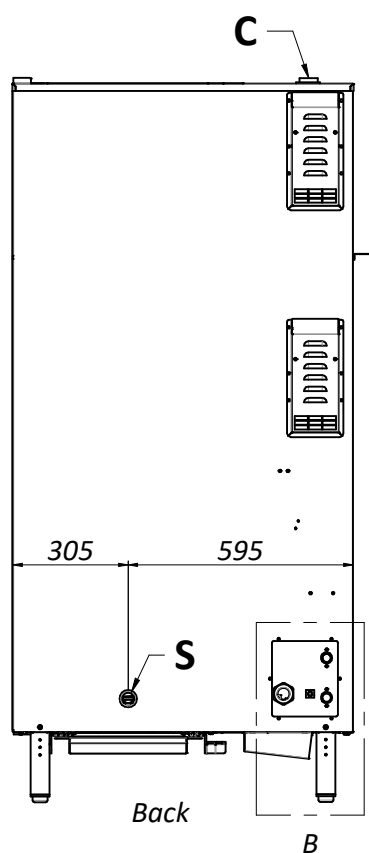
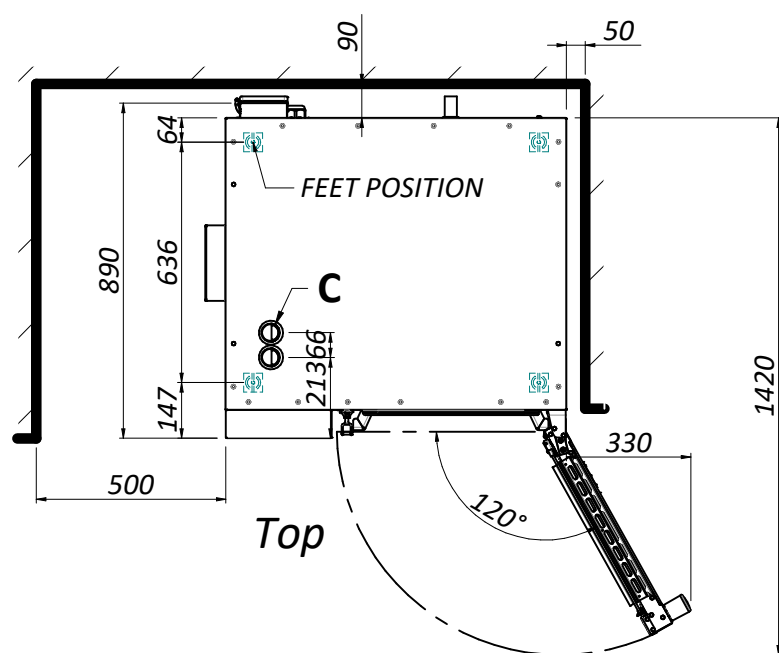


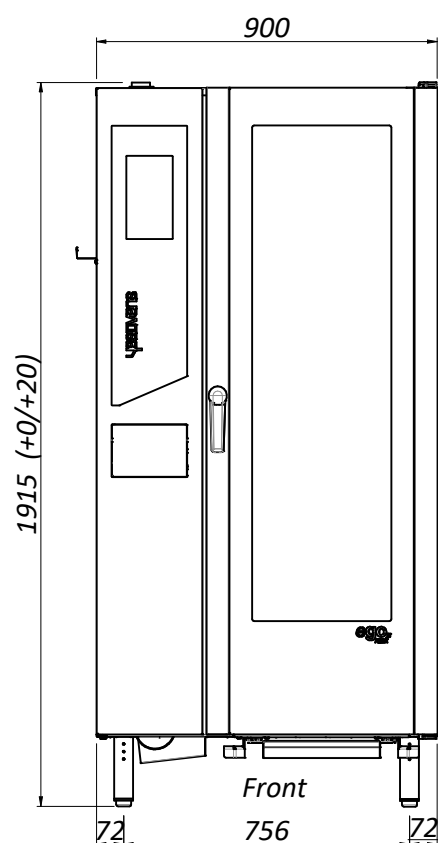

C: Steam outlet chimney / Air inlet chimney
V1: Washing solenoid valve
V2: Steam solenoid valve
E: Elettric connection
S: Drain water

Dimensions and weight

Oven width: 900 mm
 Oven depth: 890 mm
 Oven height: 1915 mm
 Net weight full optional: 225 Kg

Packaging width: 980 mm
 Packaging depth: 1010 mm
 Packaging height: 2095 mm
 Weight with packaging full optional: 265 Kg
 Packaging volume: 2.07 m³

Installation

Minimum left side distance: 500 mm
 Minimum right side distance: 50 mm
 Minimum back distance: 50 mm
 Min. distance from heat sources: 500 mm



Electrical connection

Supply: 380-415 V 3N 50/60 Hz
 Maximum power: 39 kW
 Current: 64 A
 Cable dimension: 5x10 mm²
 H07RN-F

Water connection



Water wash connection V1: 3/4"
 Steam water connection V2: 3/4" Softened
 Water pressure: 1.5-5 bar
 Max water hardness: 4° d
 Minumun Condutance: 50 µS/cm
 Exhaust size S: 32 mm

IP rating: IPx4

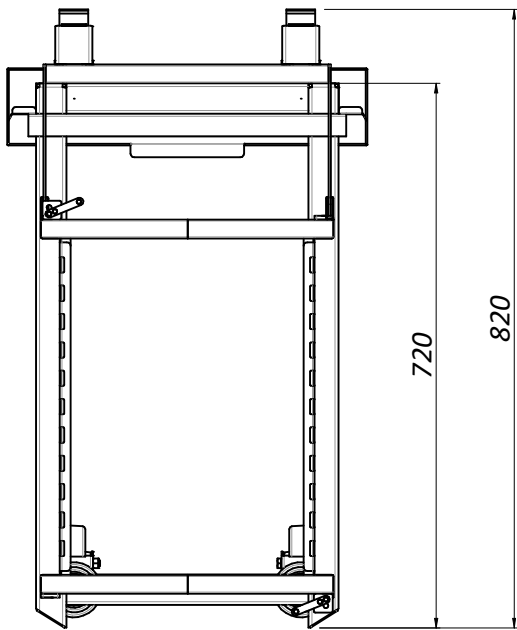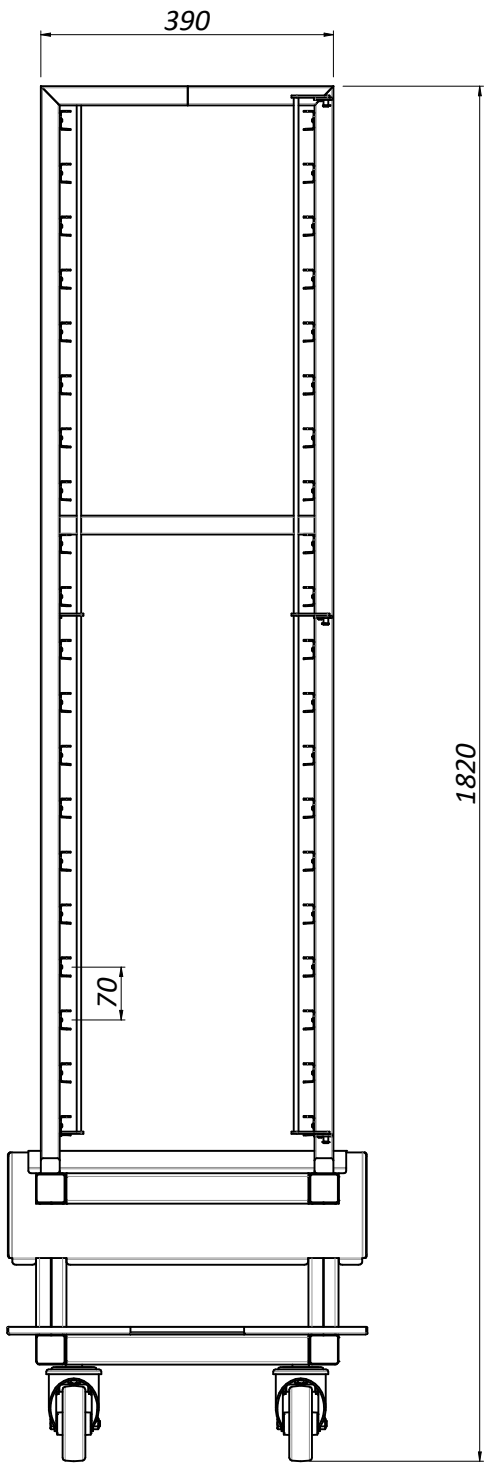

Capacity trolley

Trays type: GN11
Number of trays: 20
Distance between trays: 70 mm
Weight Trolley: 37 Kg
Max load: 90 Kg

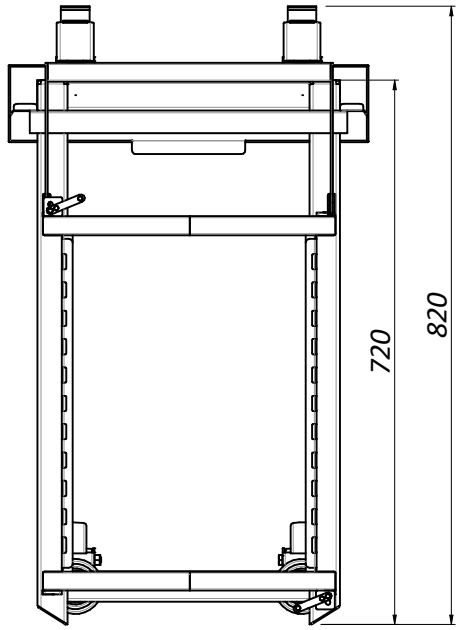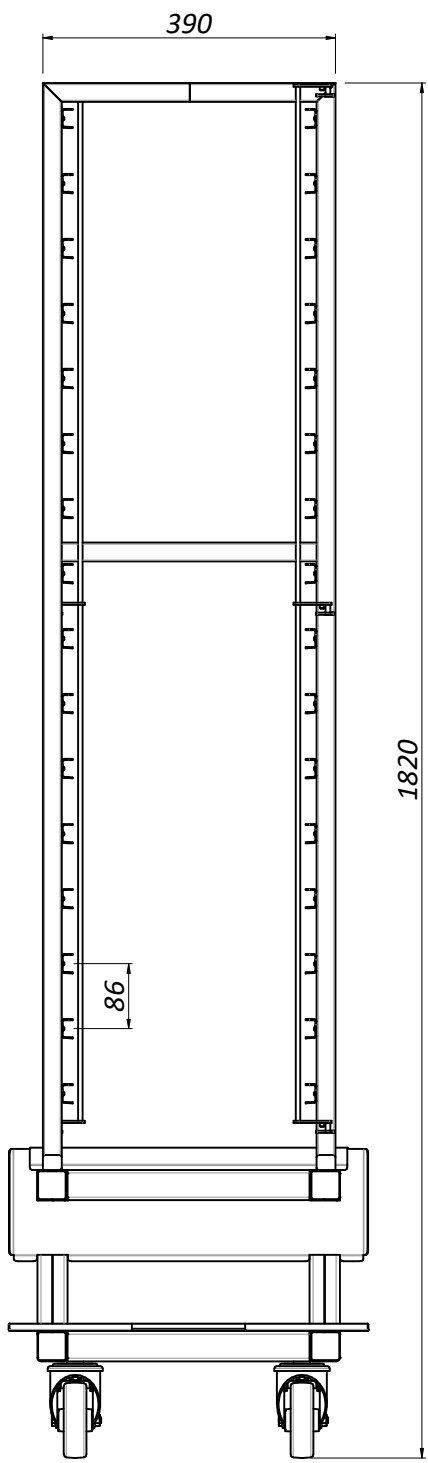

Capacity trolley

Trays type: GN11
Number of trays: 16
Distance between trays: 85 mm
Weight Trolley: 37 Kg
Max load: 90 Kg